


## M-Vision Laser 18K WUXGA

16,000 ANSI / 18,000 ISO Lumens | Contrast Ratio: 10,000:1 (Dynamic Black) | Part Number: 118-053

## M-VISION LASER 18K DIGITAL PROJECTOR

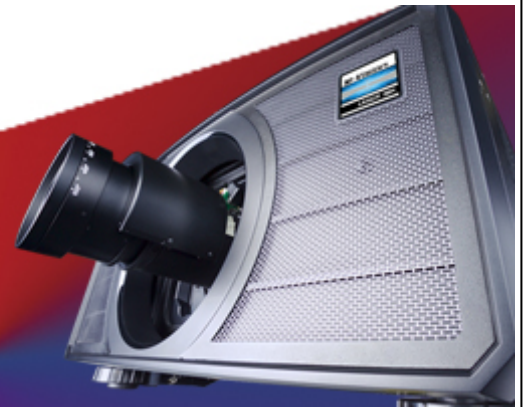

THE VISIONARIES CHOICE

16,000 ANSI / 18,000 ISO Lumens | Contrast Ratio: 10,000:1 (Dynamic Black) | Part Number: 118-053

### Colour System:

Blue Laser Phosphor + 4-segment colour wheel

### DMD Specification:

1920 x 1200 pixels native display.

Fast transit pixels for smooth greyscale and improved contrast.

### Display Type:

1 x 0.96" DarkChip™ DMD™

### Aspect Ratio:

16x10

### Fill Factor

87%

## Key Features

### Video & Graphics Processing

- HDMI 1.4b for Side by Side, Frame Packing, Frame Sequential & TopBottom 3D Formats.
- Dual Flash Processing can be used to multiply the displayed frame rate for 3D sources.
- Dual Pipe Processing: Two sources in parallel for Left and Right eyes.
- Synchronisation of active glasses.
- 3G-SDI with loop-through.
- 24p and 1080p native display.

### Geometry Correction

- Cornerstone, Vertical & Horizontal Keystone, Pincushion & Barrel, and Image Rotation.
- Blanking control for custom input window sizing.
- Scaling for fixed aspect ratio screens.

### Edge Blending

- Correction for non-active pixels at the edge of the display.

### Picture in Picture

- Two sources can be displayed either one within the other (PIP) , or side by side, with the original aspect ratios maintained.

### HDBaseT® Interface

- Built in support for transmission of uncompressed High Definition Video over standard CAT5e/6 LAN cable.
- Allows the projector to be placed up to 100m from source with low cost cabling.

### Colour Processing

- Powerful seven-point colour correction for accurate colour matching.

### Projector Controller Software

- Intuitive user interface for network control.
- Simultaneous control of user-defined groups of projectors.
- At-a-glance monitoring of projector status.

### Projector Automation

- Real-time clock provides daily on/off automation.

### Installation

- Integrated stacking mount pins.
- Eye bolts included for easy rigging.

### Source Compatibility:

3GSDI is SMPTE 292M, SMPTE 259M-C and SMPTE 424M compliant.  
 HDMI including Deep Color™ processing.  
 Graphics standards up to 1920 x 1200 resolution at 60Hz via HDMI or DisplayPort.

## Inputs/Outputs

Video & Computer			Communication & Control		
Type	Connector	Qty	Type	Connector	Qty
DisplayPort 1.1a	DisplayPort	2	3D Sync Out	BNC	1
HDMI 1.4a	HDMI	2	3D Sync In	BNC	1
3G-SDI in	BNC	1	LAN	RJ45	1
3G-SDI out	BNC	1	RS232	9-pin D-Sub	1
HDBaseT (see LAN)	LAN RJ45	1	Wired Remote	3.5mm Stereo Jack	1
			12V Trigger	3.5mm Stereo Jack	2

**NOTE: The HDBaseT**

and LAN ports are not shared.

### 3D Formats Supported

Frame Packing  
Dual Pipe  
Frame Sequential  
Side By Side (half)  
Top and Bottom

### HDTV Formats Supported

1080p (24Hz, 25Hz, 30Hz, 50Hz, 60Hz), 1080i (50Hz, 60Hz), 720p (50Hz, 60Hz)

### Computer Compatibility

Up to 1920 x 1200

### Bandwidth

165 MHz on analog RGB  
165 Megapixels per second on HDMI

### Remote Control

Addressable IR Remote Control, wireless and wired  
On-Board keypad

### Automation Control

Crestron RoomView® Connected  
PLink Class 1  
LAN  
RS232  
AMX (Device Discovery)  
Served web page

### Colour Temperature

3200K to 9300K

### Operation



### Illumination Type

Laser Light Source

### Typical Illumination Life

20,000 hours

### Lenses

Lens	Part No.	Optimised Focus Range*	Lens Shift
0.9 - 1.2 : 1 zoom	120-624	0.92m - 13.46m	Vert: 0.45 (U) 0.45 (D) frame, Hor: 0.15 (L) 0.15 (R) frame
1.20 - 1.56 : 1 zoom	120-625	1m - 17.5m	Vert: 0.5 (U) 0.5 (D) frame, Hor: 0.15 (L) 0.15 (R) frame
1.50 - 2.00 : 1 zoom	120-626	2m - 21.8m	Vert: 0.5 (U) 0.3 (D) frame, Hor: 0.15 (L) 0.15 (R) frame
2.00 - 4.00 : 1 zoom	120-627	2.5m - 41.8m	Vert: 0.5 (U) 0.3 (D) frame, Hor: 0.15 (L) 0.15 (R) frame
4.00 - 7.00 : 1 zoom	120-628	4m - 42m	Vert: 0.5 (U) 0.3 (D) frame, Hor: 0.15 (L) 0.15 (R) frame

\* Lens focal ranges above are the optimised distances but are likely to focus further, please contact your RSM for more details. Lens ratio tolerances: E-Vision Series: +/-3%. HighLite Series: +/- 5%. M-Vision Series: +/- 2%. Titan Series: +/-2%, INSIGHT Series: +/-2%,

### Lens Mount

Motorised shift, zoom and focus, with programmable shift

### Mechanical Mounting

Front/Rear Table  
Front/Rear Ceiling  
Adjustable Front/Rear Feet

### Orientation

Table Top or Inverted: Yes  
Pointing Up: Yes  
Pointing Down: Yes  
Roll (Portrait): Yes

### Power Requirements

100 - 240VAC 50/60Hz single phase \* Note that in 120V operation, the projector will be at 65% brightness

### Power Consumption

Typical 2000W @ 240VAC in Normal mode  
Typical 1200W @ 240VAC in ECO mode  
Typical 1200W @ 110VAC in Normal mode  
Typical 1000W @ 110VAC in ECO mode

### Thermal Dissipation

Typical 6482 BTU/Hour @ 220VAC in Normal mode  
Typical 3753 BTU/Hour @ 110VAC in Normal mode

### Fan Noise

Normal mode: 45 dBA max, 42 dBA typical  
Eco mode: 42 dBA max, 39dBA typical

### Operating/Storage Temperature

Operating: 0 to 40C (32 to 104F)  
Storage: -20 to 60C (-4 to 140F)

### Operating Humidity

10% to 90% relative, non-condensing

### Weight (Chassis Only)

49 kg  
108 lb

### Dimensions

H: 24.8 cm W: 53.0 cm L: 69.5 cm  
H: 9.8 in W: 20.9 in L: 27.4 in

### Safety & EMC Regulations

UL/cUL, CB, CCC, FCC Class A, CE, RoHS 2

IEC EN 60825-1:2014 Class 1 Laser Product  
IEC 60825-1:2007 Class 3R Laser Product  
IEC EN 62471-5:2015 Risk Group 3

## Accessories

Accessory	Part No.
Infrared Remote (replacement)	117-780

*\*Dimensions included for reference only and are subject to change. Please download the full set of CAD files for this display for more accurate information.*

## Downloads

[PDF CAD Drawings](#)

[User Guides](#)

[AUTOCAD Drawings](#)

[User Guides \(Korean\)](#)

[STEP / IGS Drawings](#)

[Laser Risk Group Document](#)

[Lens CAD Drawings](#)

[Important Information](#)

[Control Protocol](#)



Certificate Number 13629  
ISO 9001

Specifications subject to change without notice. ©2020 Digital Projection.  
DLP®, Digital Light Processing™ and DMD are trademarks of Texas Instruments, Inc



**DIGITAL PROJECTION, LTD** GREENSIDE WAY, MIDDLETON  
MANCHESTER, UK. M24 1XX  
T: +44.161.947.3300 | F: +44.161.684.7674 | [www.digitalprojection.co.uk](http://www.digitalprojection.co.uk)

**DIGITAL PROJECTION, INC** 55 CHASTAIN ROAD, SUITE 115 KENNESAW,  
GA. 30144  
T: 770.420.1350 } F: 770.420.1360 | [www.digitalprojection.com](http://www.digitalprojection.com)

**Digital Line Technology Group. (D.L.T)**

[제품 문의] T.0505-507-2288 | [www.dltgroup.co.kr](http://www.dltgroup.co.kr)